
— LAND PARCEL FEASIBILITY REPORT

# Gopalpur, Sector 99A

# *Gurugram, Haryana*

Survey / Khata 46//24/2 · Vacant land with Group Housing potential

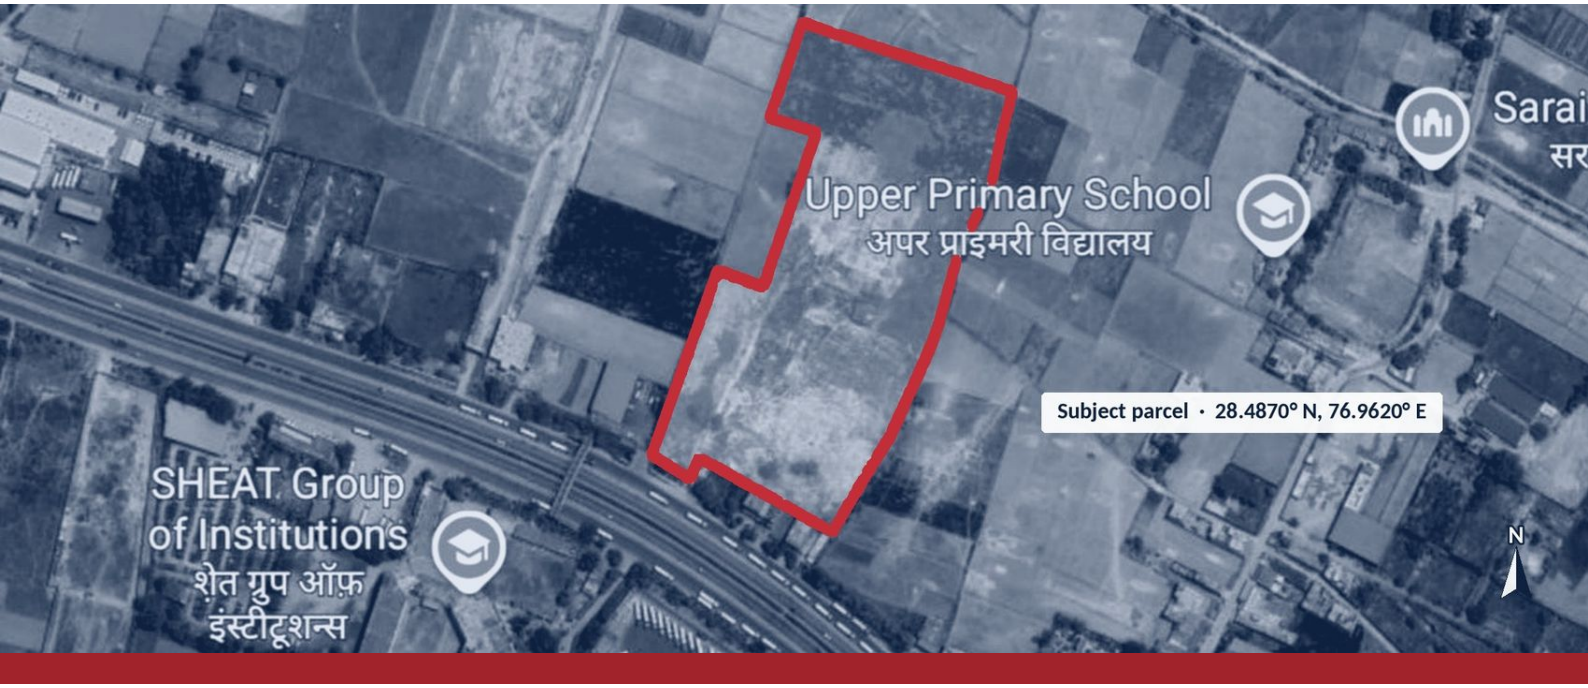


| 3,713 m² | Residential | GMUC-2031 | 3C7-T25-PCC3 |
|---|---|---|---|
| MEASURED AREA | PLANNED USE | MASTER PLAN | DIGIPIN |
| 0.92 acres | 100% · GMUC-2031 | DTCP Haryana | Gurugram · Harsaru |

— CONTENTS

# What's in this report

Every report includes the cover, contents, executive summary and methodology. The numbered sections are chosen on the platform.


| | | | |
|---|---|---|---|
| — | Executive Summary | | • Snapshot of the property + boundary map<br>• Summary of key findings<br>• Location details<br>• Master plan; zoning / land-use<br>• Red flag summary |
| 01 | Property Overview | **Ownership** | • Survey number / khata<br>• Owner details |
| | | **Vaastu** | • Plot orientation<br>• Plot shape<br>• Vaastu rating |
| 02 | Infrastructure & Connectivity | **Existing infrastructure** | • Highways and access roads<br>• Airports, metro, RRTS, railway network and ports<br>• Social infrastructure |
| | | **Upcoming infrastructure** | • Upcoming projects with map view<br>• Potential travel time and distance reduction |
| | | **Satellite imagery** | • Direction of city growth over 10 years |
| 03 | Regulatory & Approvals | **Boundary and zoning** | • Regulatory restrictions<br>• Government approval requirements |
| | | **Buildability / development potential** | • Applicable government schemes and bylaws<br>• Permissible FSI and density norms |
| 04 | Property Records, Ownership & Litigation | **Title check & ownership history** | • Encumbrance verification<br>• Legal & title review<br>• Title chain history<br>• CERSAI records check |
| | | **Borrower, group & promoter due diligence** | • Borrower profile reports<br>• Group company(s) litigation<br>• Promoter litigation – individual & company |
| | | **Reputation & compliance screening** | • Adverse news findings<br>• UN sanction list screening |
| 05 | Market & Catchment Intelligence | **Market and transaction data** | • Launched projects & units<br>• Absorption & inventory overhang<br>• Pricing trends in micro-market<br>• Historic price trends in established micro-markets<br>• Developer land banks in catchment |
| | | **Demographics and economic activity** | • Built environment trends<br>• Commercial activity trends<br>• Catchment demographics<br>• Population growth data<br>• Consumption trends and purchasing power |
| 06 | Site Attributes & Considerations | **Physical characteristics** | • Seismic zone / terrain map<br>• Groundwater and soil analysis<br>• Flood exposure<br>• Contour profiling (slope & direction) |
| | | **Structures on parcel / encroachments** | • Structures within the boundary<br>• Built-up area |

AT A GLANCE

# Executive summary

ES

The parcel at a glance: the key facts, what the records confirm and what needs attention before acquisition.

SUBJECT PARCEL




Source: supplied boundary on satellite base

## 3,713 m²

MEASURED AREA

0.92 acres · 3,692.8 m² per revenue record

## Residential

PLANNED USE

Group Housing · GMUC-2031

## ₹45,000 / m²

CIRCLE RATE

government guideline rate, Harsaru

| MASTER PLAN | SURVEY / KHATA | DISTRICT / TEHSIL | DIGIPIN |
|---|---|---|---|
| GMUC-2031 | 46//24/2 | Gurugram | 3C7-T25-PCC3 |
| DTCP Haryana | khata not listed | Harsaru | |

## STATUS AND RED FLAGS

| AREA | WHAT THE RECORDS SHOW | STATUS |
|---|---|---|
| **Ownership & title** | Registered to M/s HASTA Infrastructure Pvt. Ltd.; mutation not yet confirmed | Review |
| **Zoning & land use** | Residential under GMUC-2031; recorded use is agricultural, CLU to be confirmed | Review |
| **Structures on parcel** | 3 structures cover about 5.8% of the land; 1 crosses the boundary | Flag |
| **Seismic zone** | BIS Zone IV, high damage risk (IS 1893:2016) | Flag |
| **Environmental** | Proposed EC SIA/HR/INFRA2/558167/2026 overlaps the parcel; high-tension line 71 m away | Flag |
| **Connectivity** | IGI Airport 31 min; NH-248BB 9.8 km; three road and power projects under way | Favourable |
| **Flood exposure** | No mapped exposure; nearest flood footprint 28.2 km | Favourable |
| **Records & litigation** | Encumbrance, CERSAI and litigation checks are being compiled | In preparation |

SECTION 01

# Property Overview

01


Who owns the parcel, its survey and khata record, and a Vastu reading of the plot's orientation and shape.

| HASTA Infra | 3,692.8 m² | 31 | Pending |
|---|---|---|---|
| REGISTERED OWNER | RECORD AREA | KHATA | MUTATION |
| M/s HASTA Infrastructure Pvt. Ltd. | 7 kanal 6 marla per survey | Surveys 133 & 144 | to be verified |

## 1.1 OWNERSHIP

Registered to M/s HASTA Infrastructure Pvt. Ltd. across two surveys, 133 and 144.

OWNERSHIP AND NEIGHBOURING SURVEYS

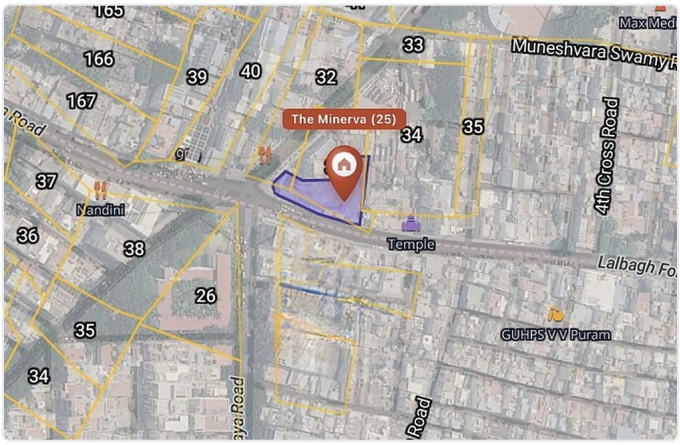


Source: supplied survey map

OWNER
M/s HASTA Infrastructure Pvt. Ltd.
Surveys 133 and 144

KHATA
31
both surveys

AREA PER SURVEY
7 kanal 6 marla
3,692.8 m² each

## 1.2 OWNERSHIP & TITLE CHAIN

Three owners in 28 years. The 2018 sale has not yet been recorded as a mutation.

OWNERSHIP TIMELINE, 1998 TO TODAY

| 15 Jun 1998 | 02 Nov 2010 | 20 Apr 2018 | Pending |
|---|---|---|---|
| **Late Ram Singh** | **Ram Singh & Sons HUF** | **M/s HASTA Infrastructure** | **Mutation** |
| Khatedar · State Govt. allotment | Legal heirs · inheritance | Pvt. Ltd. · purchase | to be verified |

held 12 yrs · held 7 yrs · held 8 yrs

2000 · 2005 · 2010 · 2015 · 2020 · 2025


Source: jamabandi and sale records in the supplied draft

## 1.3 VASTU ANALYSIS

7 of 8 Vastu parameters are favourable; only the north-east corner needs review.

Directional assessment per Vastu Shastra principles, based on the supplied boundary survey and site orientation. Indicative only; not a substitute for a site consultation.

SITE ORIENTATION

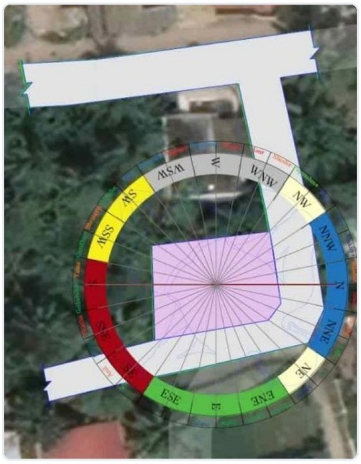


Source: supplied Vastu survey

**7 of 8**
PARAMETERS FAVOURABLE
standard Vastu Shastra guidelines

**NE corner**
POINT OF REVIEW
partly affected by a structure

**RECOMMENDATION**
Confirm removal or relocation of the NE structure before layout planning; place the main mass toward the South-West, with entrances and open areas facing North / North-East.

| | | | |
|---|---|---|---|
| ✓ | **Plot shape** | Rectangular, regular geometry<br>*Guideline: Square / rectangular, regular geometry* |
| ✓ | **Road facing** | Faces North · 60 m wide access road<br>*Guideline: North or East facing preferred* |
| ✓ | **Main entry (gate)** | NE corner open, accessible from road<br>*Guideline: North-East (Ishanya) ideal* |
| ✓ | **Slope of land** | Level parcel; slight fall to NE per contour<br>*Guideline: Fall towards North / East; high in SW* |
| ! | **North-East corner** | Partly affected; existing structure crosses boundary near NE<br>*Guideline: Should stay open, unobstructed, lowest point* |
| ✓ | **South-West zone** | No existing structures in SW<br>*Guideline: Suited for heavier mass / main structure* |
| – | **Water body / low point** | None on record within parcel<br>*Guideline: Ideal in North or North-East* |
| ✓ | **Corner cuts** | None identified in supplied boundary survey<br>*Guideline: Avoid cuts or missing corners, esp. SW* |

SECTION 02

# Infrastructure & Connectivity

02

Roads, airports, metro, rail and social infrastructure today, what's coming next, and how the area has grown.


| 31 min | 18 km | 9.8 km | 3 |
|---|---|---|---|
| AIRPORT (IGI) | METRO | HIGHWAY | UPCOMING PROJECTS |
| 25.9 km via Dwarka Expressway | about 35 min | NH-248BB · 15 min | ₹850 Cr in pipeline |

## 2.1 EXISTING INFRASTRUCTURE · TRAVEL TIME FROM THE SITE

Rail and the highway are within 15 minutes; the airport, metro and Cyber City are 31 to 40 minutes away.

DISTANCE AND DRIVE TIME FROM THE SITE

| DESTINATION | DRIVE TIME | ROAD DISTANCE |
|---|---|---|
| Access road | adjacent | |
| Railway station | 10 min | 3.9 km |
| Highway NH-248BB | 15 min | 9.8 km |
| IGI Airport | 31 min | 25.9 km |
| Metro station | 35 min | 18 km |
| Cyber City CBD | 40 min | 18 km |

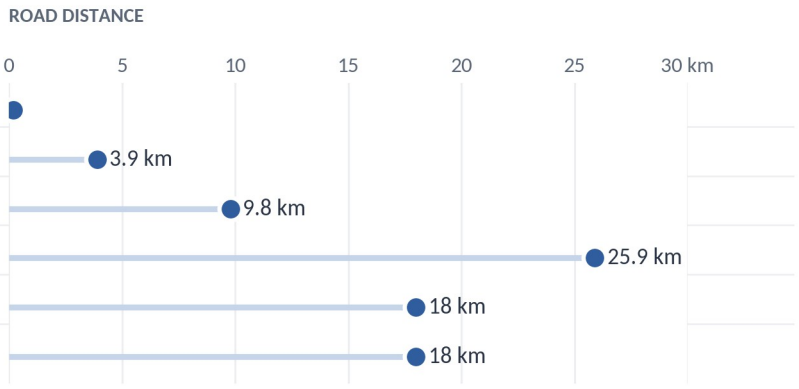


Source: supplied draft · road distance; peak-hour drive times

## 2.2 SOCIAL INFRASTRUCTURE

Three schools, five hospitals and three shopping centres lie within 1 km.

| 3 | 5 | 3 | 1 | 2 |
|---|---|---|---|---|
| **Schools** | **Hospitals** | **Shopping** | **Police** | **IT parks** |
| within 1 km | within 1 km | within 1 km | 2.8 km | 4.5 km |

## 2.3 INFRASTRUCTURE MAP

The site in its setting: highways, metro, rail and everyday amenities around the plot.

INFRASTRUCTURE AROUND THE SITE





Source: supplied infrastructure map with key distances

## 2.4 UPCOMING INFRASTRUCTURE PROJECTS

Three road and power projects are due for completion between November 2026 and May 2027.

UPCOMING PROJECTS · OFFICIAL COMPLETION DATE

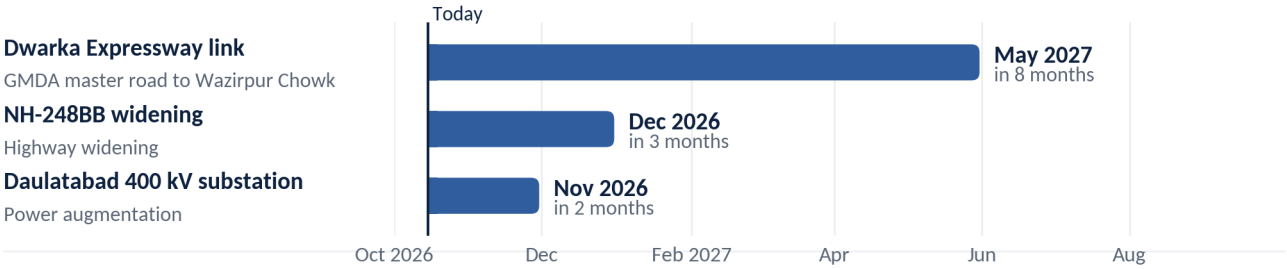



Source: GMDA, NHAI and HVPNL timelines as cited in the supplied draft

## 2.5 TRAVEL TIME SAVINGS FROM NEW INFRASTRUCTURE

Once the projects are complete, trips to the airport, Cyber City and Aerocity get 7 to 12 minutes shorter.

DRIVE TIME, TODAY VS AFTER UPCOMING PROJECTS (MIN)

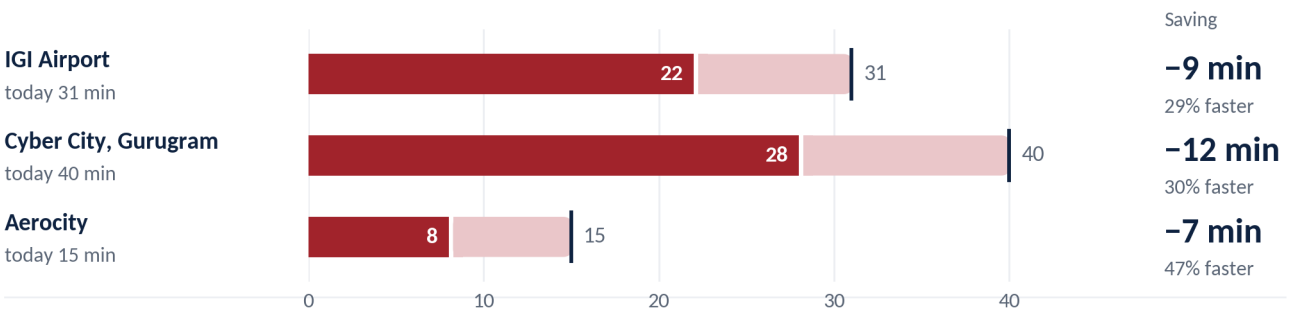


Source: projected travel times from the supplied draft · indicative

## 2.6 UPCOMING INFRASTRUCTURE MAP

Where the new road, rail and power projects run in relation to the site.

UPCOMING ROAD, RAIL AND POWER PROJECTS





Source: supplied upcoming infrastructure map

## 2.7 SATELLITE IMAGERY · TEN YEARS OF GROWTH

Built-up land in this area rose from 42% to 51% between 2015 and 2025: about 15% of the land that was open in 2015 has since been built on.

The numbered boxes mark three places where farmland has given way to housing. Each is shown below as it looked in 2015 and in 2025.

2025 VIEW OF THE AREA · THREE PLACES THAT CHANGED, 2015 VS 2025

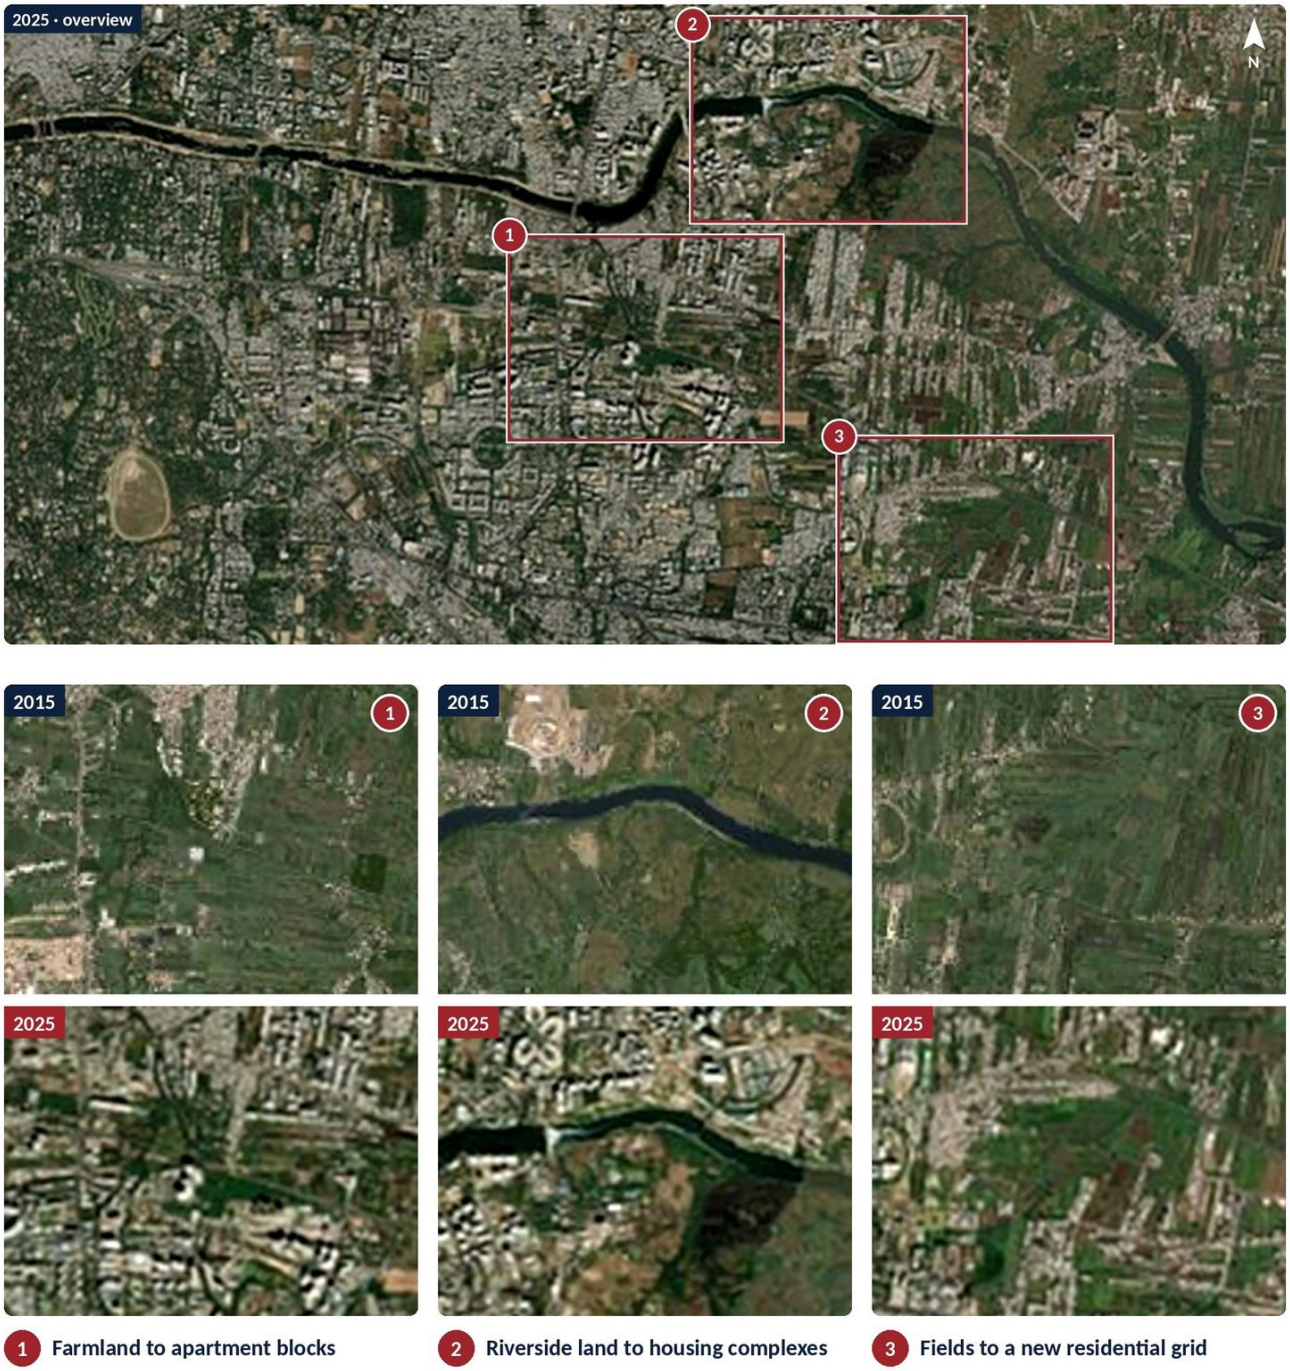


Source: supplied 2015 and 2025 satellite imagery, aligned to the same ground frame and compared automatically · indicative

SECTION 03

# Regulatory & Approvals

03

Zoning and regulatory restrictions, the approvals required, applicable schemes, and how much can be built.

| 1.5–2.25 | 8,354 m² | ≈130 m | 5 |
|---|---|---|---|
| FAR RANGE | BUILDABLE AREA | HEIGHT HEADROOM | APPROVALS NEEDED |
| up to 3.0 with TDR | upper bound on 3,713 m² | about 43 floors | see checklist below |

## 3.1 ENVIRONMENTAL CLEARANCES WITHIN 5 KM

One clearance is proposed on the parcel itself; another was granted 177 m away.

| PROJECT | STATUS | DISTANCE |
|---|---|---|
| **Group Housing Colony project · Gopalpur** | Proposed | On parcel |
| **EC extension · Residential Group Housing, Sector 99A, Gopalpur** | Granted | 177 m SW |

## 3.2 LEGAL / TITLE CHECKS

No litigation found. Encumbrance status still needs a manual search.

LOW

**Litigation**

No dispute, complaint or litigation identified in the records reviewed.

REVIEW

**Encumbrance / charge status**

A manual index search at the Harsaru sub-registrar is needed to confirm charge status.

## 3.3 APPROVALS CHECKLIST


Five approvals are needed before construction can start.

| | | |
|---|---|---|
| 01 | **Residential CLU**<br>DTCP HARYANA | Confirm CLU; recorded use is agricultural, planned use Residential. |
| 02 | **Height NOC**<br>AAI · NOCAS | Apply via NOCAS; draft top elevation is 345 m AMSL. |
| 03 | **Environmental clearance**<br>HSPCB | Verify proposed EC SIA/HR/INFRA2/558167/2026. |
| 04 | **Encumbrance certificate**<br>HARSARU SUB-REGISTRAR | Manual index search required. |
| 05 | **Jamabandi / mutation**<br>HARSARU TEHSIL | Confirm mutation; draft cites 2023–2024 jamabandi. |

## 3.4 AIRPORT HEIGHT LIMITS

The airport caps buildings at 345 m above sea level. The site sits at 215 m, so a building can rise about 130 m, roughly 43 floors.

HOW THE MAXIMUM BUILDING HEIGHT IS WORKED OUT

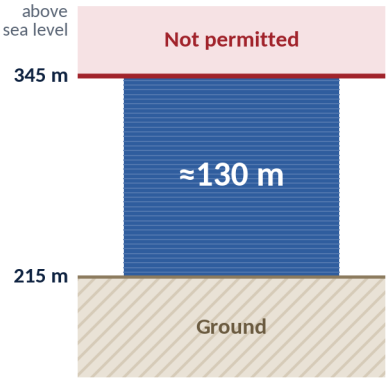


| | |
|---|---|
| Airport height limit<br>above sea level, set by the IGI Airport conical surface | 345 m |
| Ground level at the site<br>above sea level | − 215 m |
| Maximum building height<br>about 43 floors at roughly 3 m per floor | = 130 m |


A height NOC from AAI (via NOCAS) is required before construction.

Source: AAI NOCAS conical surface for IGI Airport · floors at about 3 m each

## 3.5 ENVIRONMENTAL RESTRICTIONS

One item needs review: a high-tension line 71 m away. Water bodies are over 1 km away and protected areas over 5 km.


DISTANCE FROM THE PARCEL BOUNDARY (LOG SCALE)

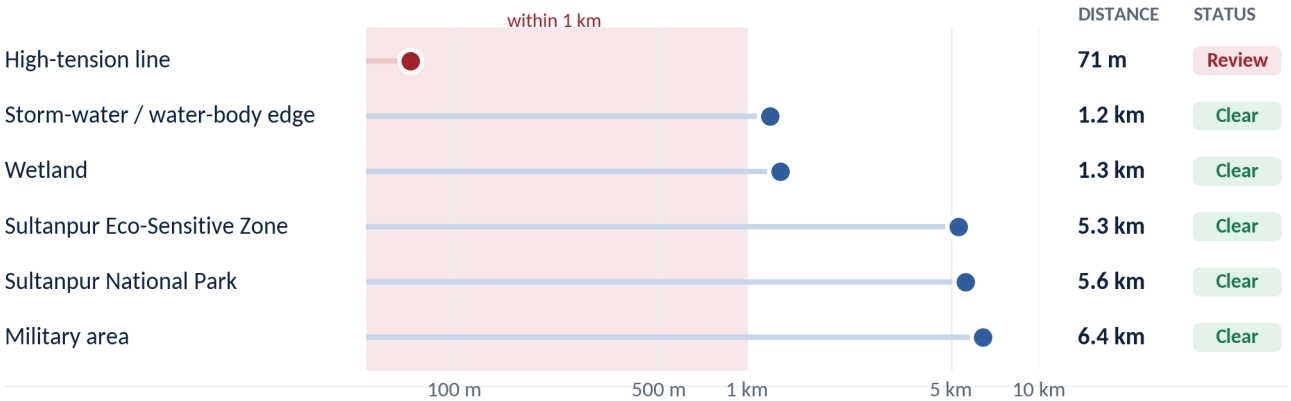


Source: environmental layers in the supplied draft

## 3.6 BUILDABILITY & DEVELOPMENT POTENTIAL

The plot can carry 1.5 to 2.25 times its area in floor space today (up to 8,354 m²), or 3 times with TDR (11,139 m²).

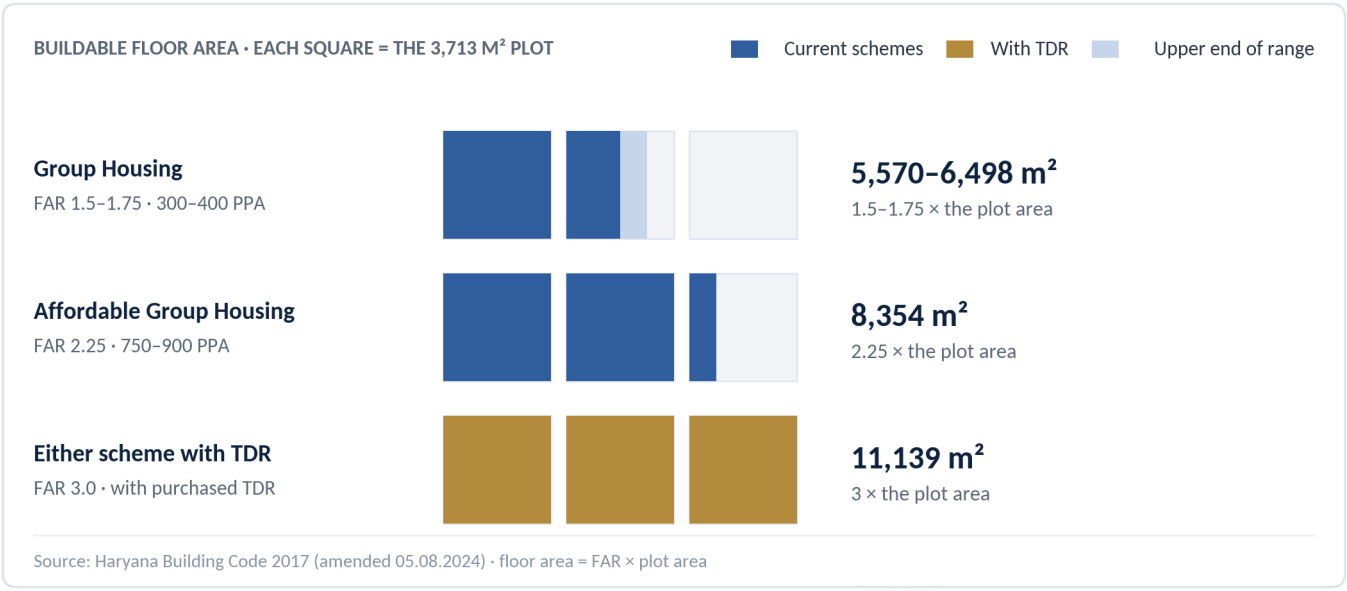


## 3.7 GOVERNMENT SCHEMES APPLICABLE IN THE AREA

Four schemes shape what can be built here.

HARYANA BUILDING CODE
**2017 code**
as amended to 05.08.2024 · FAR and density norms for Group Housing

AFFORDABLE GROUP HOUSING
**2013 policy**
higher FAR of 2.25; subject to licence category

TOD POLICY
**Transit-oriented**
extra FAR near qualifying transit corridors

TDR SCHEME
**Transferable rights**
purchased TDR lifts FAR to 3.0

SECTION 04

# Property Records, Ownership & Litigation

04

Encumbrances, title chain and CERSAI checks, plus litigation and reputation screening of the borrower, group and promoters.

## 4.1 WHAT THIS SECTION WILL ANSWER

Nine checks answer three questions an investor needs settled before committing. All are in preparation; results follow in the next version.

**TITLE & OWNERSHIP**

4 checks

Is the title clean, unencumbered and correctly recorded?

**BORROWER, GROUP & PROMOTERS**

3 checks

Do the parties behind the deal carry legal or credit risk?

**REPUTATION & COMPLIANCE**

2 checks

Is there adverse news or any sanctions exposure?

## 4.2 CHECK REGISTER

| CHECK | SOURCE | STATUS |
|---|---|---|
| **TITLE & OWNERSHIP** | | |
| Encumbrance verification | Sub-Registrar encumbrance certificate | In preparation |
| Legal & title review | Legal counsel | In preparation |
| Title chain history, 30 years | Revenue records and sale deeds | In preparation |
| CERSAI records check | CERSAI search | In preparation |
| **BORROWER, GROUP & PROMOTERS** | | |
| Borrower profile | MCA and credit bureau | In preparation |
| Group company litigation | Court records search | In preparation |
| Promoter litigation | Court records search | In preparation |
| **REPUTATION & COMPLIANCE** | | |
| Adverse news screening | Media database | In preparation |
| Sanctions screening | UN and OFAC lists | In preparation |

WHEN COMPLETE Favourable nothing adverse Review needs a closer look Flag material issue

SECTION 05

# Market & Catchment Intelligence

05

Launches, absorption, pricing and developer land banks, plus who lives, works and spends within reach of the site.

| ≈72% | ₹8.2–9.5k | 7 mo | +6% QoQ |
|---|---|---|---|
| SALES / ABSORPTION 2026 | PRICE / SQ FT | INVENTORY OVERHANG | PRICE TREND |
| indicative | current, indicative | months of supply | last 3 quarters |

## 5.1 MARKET & TRANSACTION DATA

Six projects within 3 km; about 1,850 units launched in 2026.

| PROJECTS WITHIN 3 KM | UNITS LAUNCHED IN 2026 | NEAREST MICRO-MARKET | MICRO-MARKET PRICE |
|---|---|---|---|
| 6 | ≈1,850 | Sector 99 | ₹8,800 / sq ft |
| launched / under construction | indicative | Dwarka Expressway, Gurugram | average (indicative) |

*Dwarka Expressway gives the micro-market direct access to Delhi and the airport.*

## 5.2 REAL ESTATE DEVELOPER LAND BANKS WITHIN 10 KM


Prestige holds the largest land bank nearby, at 100 acres.

DEVELOPER LAND PARCELS WITHIN 10 KM



Source: supplied land bank map

LAND BANK WITHIN 10 KM, ACRES

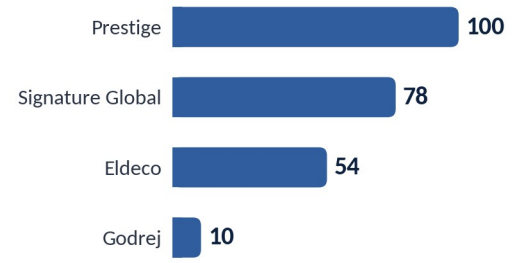



Source: developer disclosures in the supplied draft

## 5.3 DEMOGRAPHICS & ECONOMIC ACTIVITY

| 274,956 | +16% | +14% | 38.2% |
|---|---|---|---|
| POPULATION WITHIN 5 KM | POPULATION GROWTH<br>5 years | HOUSEHOLD GROWTH<br>5 years | AFFLUENCE INDEX<br>households over ₹10 lakh a year |


## 5.4 FIVE-YEAR GROWTH · BUILT ENVIRONMENT AND COMMERCIAL & SOCIAL ACTIVITY

Medical facilities (+25%) and residential property (+22%) grew fastest over five years.

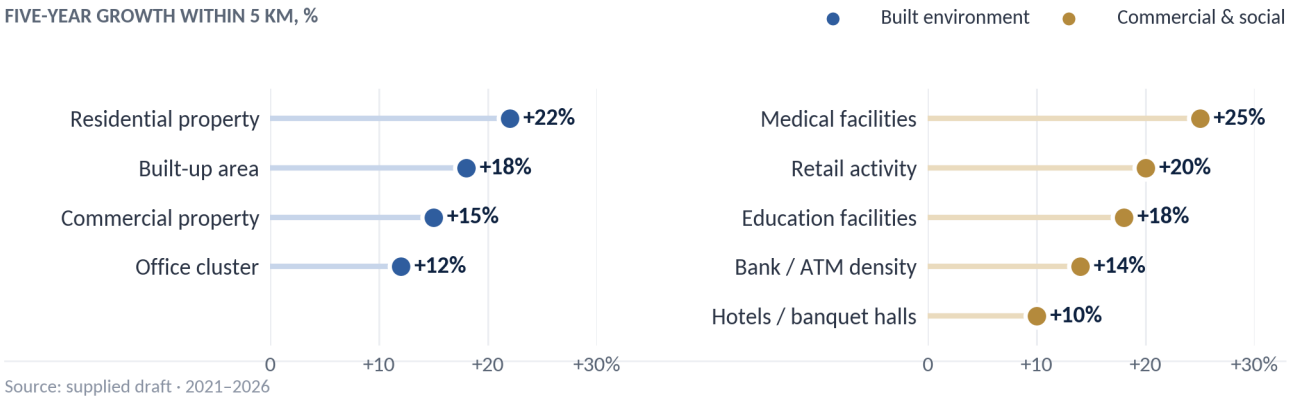


Source: supplied draft · 2021–2026

## 5.5 POPULATION GROWTH INDICATORS

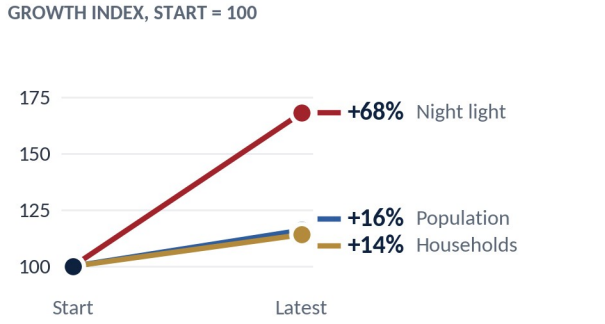


Source: VIIRS 2018–24; population estimates

### Night-time light has grown four times faster than population.

Night-time radiance (satellite-measured light at night, 2018–2024) is a proxy for economic activity. Population and household growth are five-year figures.

## 5.6 CATCHMENT DEMOGRAPHICS

Most residents are of working age, and more than a third of households earn over ₹10 lakh a year.

CATCHMENT PROFILE, OUT OF EVERY 100



**54**
residents are male
46 of 100 are female



**≈62**
residents are 25–45
years of age



**38**
households earn
over ₹10 lakh a year

Source: supplied draft · indicative

SECTION 06

# Site Attributes & Considerations

06

The ground itself: seismic zone and terrain, groundwater and soil, flood exposure, slope, and structures on the parcel.

| Zone IV | None | 215 m | 5.76% |
|---|---|---|---|
| SEISMIC ZONE | FLOOD EXPOSURE | ELEVATION | BUILT-UP ON PARCEL |
| high damage risk | mapped · nearest 28.2 km | AMSL · flat terrain | 213.7 m² · 3 structures |

## 6.1 SEISMIC ZONE

BIS SEISMIC ZONE (IS 1893:2016)




Source: Bureau of Indian Standards

### High damage risk zone.

BIS Seismic Zone IV under IS 1893:2016. Structural design should follow the Zone IV provisions of the code.

## 6.2 TERRAIN, SLOPE & SOIL

The parcel is almost flat, with about a 2 m fall from west to east.

CONTOURS AND SURFACE FLOW PATHS




Source: supplied terrain map

SLOPE / ASPECT
0.2° NE-facing
indicative


GROUNDWATER & SOIL
Loam topsoil, pH 7.7
groundwater stress not assessed

TERRAIN
Flat
minimal slope variance

ELEVATION PROFILE, M RELATIVE TO WEST EDGE




SLOPE, SHARE OF PARCEL AREA




Source: redrawn from the supplied terrain analysis

## 6.3 STRUCTURES ON PARCEL / ENCROACHMENTS

Three structures cover 5.76% of the parcel; one crosses the boundary.

PARCEL BOUNDARY AND STRUCTURES




Source: supplied satellite view · structure footprints not annotated

| 3 | 2 · 1 | 213.7 m² |
|---|---|---|
| STRUCTURES INTERSECTING PARCEL | INSIDE / CROSSING BOUNDARY | BUILT-UP AREA INSIDE PARCEL |
| | 2 fully inside, 1 crossing | of 3,713 m² |

BUILT-UP SHARE OF THE PARCEL, DRAWN TO SCALE BY AREA




**5.76%**

of the parcel is built up: 3 structures, 213.7 m² of 3,713 m², one crossing the boundary

Source: footprints from the supplied boundary · not a survey

## 6.4 SITE SUMMARY

| AREA | WHAT THE RECORDS SHOW | STATUS |
|---|---|---|
| **Seismic zone** | BIS Zone IV, high damage risk; design to IS 1893:2016 Zone IV provisions | Flag |
| **Structures** | 3 structures on the parcel, 1 crossing the boundary; removal or regularisation to be confirmed | Flag |
| **Flood exposure** | No mapped exposure; nearest flood footprint 28.2 km | Favourable |
| **Terrain & slope** | Flat; about 2 m fall west to east, 62% of the area under 2° | Favourable |
| **Soil & groundwater** | Loam topsoil, pH 7.7; groundwater stress not assessed | Review |

APPENDIX

# Methodology

A

How this report was put together, and the sources behind each section.

## DATA SOURCES

| DOMAIN | SOURCE |
|---|---|
| **Master plan & zoning** | DTCP Haryana · GMUC-2031 |
| **Revenue & ownership records** | Jamabandi, Harsaru tehsil (supplied extracts) |
| **Market & transaction data** | PropEquity (indicative) |
| **Digital connectivity** | Ookla (indicative) |
| **Satellite & terrain imagery** | Supplied source imagery, 2015 and 2025 |
| **Seismic classification** | BIS IS 1893:2016 |

## HOW THE SATELLITE COMPARISON WORKS

The 2015 and 2025 images are aligned to the same ground frame using fixed landmarks. Each pixel is classed as built-up or open from its colour and texture, and the two years are compared. Results are indicative and are not a land survey.

## CONFIDENTIALITY

This document is strictly private and confidential. It has been prepared solely for the addressee's internal evaluation and must not be reproduced, distributed, or disclosed, in whole or in part, to any third party without the prior written consent of HDFC Capital.

## IMPORTANT NOTES

- Figures marked indicative or with an asterisk are estimates from the sources listed and are not a formal valuation.
- Areas derived from mapped boundaries are approximate and are not a legal survey.
- District / state GDP growth figures were not available in the source data.
- All figures in this sample report are dummy data for demonstration.